

(19)



(11)

EP 1 459 688 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
23.07.2008 Bulletin 2008/30

(51) Int Cl.:
A61B 17/34 (2006.01)

(21) Application number: **04251605.4**

(22) Date of filing: **19.03.2004**

(54) **Improved conical trocar seal**

Verbessertes Abdichtungssystem für Trokar

Joint conique amélioré pour trocart

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **21.03.2003 US 456386 P**
15.10.2003 US 687502

(43) Date of publication of application:
22.09.2004 Bulletin 2004/39

(73) Proprietor: **ETHICON ENDO-SURGERY, INC.**
Cincinnati, OH 45242-2839 (US)

(72) Inventors:
• **Cropper, Michael S.**
Edgewood
Kentucky 41017 (US)
• **Franer, Paul T.**
Cincinnati
Ohio 45233 (US)
• **Gilker, Thomas A.**
Cincinnati
Ohio 45211 (US)
• **Hueil, Geoffrey C.**
Mason
Ohio 45040 (US)

- **Norvell, David K.**
Monroe
Ohio 45050 (US)
- **Thompson, Brian J.**
Cincinnati
Ohio 45226 (US)
- **Voegele, Aaron C.**
Loveland
Ohio 45140 (US)
- **Franer, Mark S.**
Mason
Ohio 45040 (US)

(74) Representative: **Tunstall, Christopher Stephen et al**
Carpmaels & Ransford
43-45 Bloomsbury Square
London WC1A 2RA (GB)

(56) References cited:
EP-A- 0 567 142 **EP-A- 0 696 459**
EP-A- 1 348 386 **US-A- 5 342 315**
US-A- 5 743 884

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 459 688 B1

Description

[0001] Field of the Invention

[0002] The present invention has application in conventional endoscopic and open surgical instrumentation as well application in robotic-assisted surgery. The present invention further relates to trocars to assist in performing minimally invasive surgery and, more particularly, to improved seals for such trocars.

[0003] Background of the Invention

[0004] The use of endoscopic procedures in surgery has become widely accepted. The term endoscopic as used herein is defined to include all types of minimally invasive surgical procedures including laparoscopic and arthroscopic procedures. Accordingly, numerous endoscopic instruments have been developed which allow the surgeon to perform complex surgical procedures with minimal incisions into the skin and tissue surrounding a particular body cavity or anatomical region. In order to introduce the endoscopic instrumentation into the body cavity, it is often necessary to puncture and cannulate the body cavity by using a trocar. Trocars are widely known in the art and typically consist of an obturator and a trocar cannula. An example of a trocar can be found in U.S. Patent 6,017,356 issued to Frederick et al. on January 25, 2000.

[0005] It is common for a sealing arrangement or sealing device to be used in association with the cannula to prevent the escape of fluid or gas during endoscopic procedures. During an endoscopic surgical procedure, the internal gas pressure must be maintained in order to successfully complete the procedure. In order to maintain the internal gas pressure while instruments are passed into and out of the trocars positioned in a body cavity, sealing devices are required for both the instruments and for the trocar assemblies. That is most trocars have two sealing devices. One which seals the trocar when there is not an instrument passing therethrough, and one which seals the trocar as instruments are passed therethrough. Furthermore, it is desirable that the sealing device maintain gas pressure in the abdominal cavity, despite numerous insertions and withdrawals of surgical instruments through the trocar cannula.

[0006] Most commercially available trocars have an outer seal and an inner seal. The outer seal is typically a gasket located at the proximal most end of the trocar cannula. This gasket tightly fits itself around the elongated shafts of any medical devices passing therethrough. Therefore, the outer seal prevents fluids from escaping the body cavity through the trocar cannula while surgical instruments are being used with the cannula. The inner seal is typically what is referred to as a flapper door. It is made from a rigid, typically plastic, door which is spring biased against an inner gasket. The inner seal prevents fluids from escaping the body cavity through the trocar cannula while the trocar cannula is not in use, i.e. with no surgical instruments or obturators passing there-through. The inner seal is located with the trocar cannula

handle, distal to the outer seal.

[0007] EP 0 567 142, discloses a trocar according to the preamble of claim 1. US 5 743 884 discloses a sealing structure for a medical instrument.

[0008] Summary of the Invention

[0009] The present invention provides a trocar as recited in the claims.

Brief Description of the Drawings

[0010] Figure 1 is a perspective view of a trocar in accordance with the present invention.

[0011] Figure 2 is an exploded view of the seal assembly 2 of the present invention.

[0012] Figure 2A, is a view similar to that of Figure 2 but showing the protector segments 40 and seal segments 4a-4d assembled in a preferred embodiment.

[0013] Figure 3 is a plan view of the seal segments 4 (a) - 4(d) used in the seal 5 of the present invention.

[0014] Figure 4 is a perspective view of the retainer ring assembly 20 used in the present invention and seal segments 4a-4d separated for clarity.

[0015] Figure 5 is a perspective view showing seal 5 of the present invention.

[0016] Figure 6 is a perspective view of seal 5, attached to a flotation system 80 having an instrument 90 inserted therethrough.

[0017] Figure 7 is a cross-sectional view of trocar 100 shown in Figure 1, taken along line 7-7 and having the obturator 110 removed for clarity.

[0018] DETAILED DESCRIPTION OF THE DRAWINGS

[0019] Referring now to the drawings wherein like numerals indicate the same elements throughout the views, there is shown in Figure 1 a trocar, 100 in accordance with the present invention. Trocar 100 can be similar to the one described in U.S. Patent 6,017,356 issued to Fredrick et al. Trocar 100 comprises of cannula portion 110 and obturator portion 120. The obturator portion is well known to those skilled in the art, and can be bladed and non-bladed such as those available on the ENDO-PATH II® Trocar sold by Ethicon Endo-Surgery, Cincinnati, OH. Obturator portion 120 has a piercing tip 122 which is used to pierce the patients tissue until it reaches the abdominal cavity. After penetration into the abdominal cavity is complete, obturator portion 120 can be removed from cannula portion 110. After the obturator portion is removed, any number of surgical instruments such as, for example, a tissue fastening instrument can be inserted through the cannula of the trocar to perform the surgical procedure.

[0020] As seen from Figure 7, a preferred embodiment of the present invention is a trocar 100 for performing a procedure on a patient. Trocar 100 includes a hollow cannula 202 having a distal end 204 and a proximal end 206. Trocar 100 also includes a housing 210 having a distal end 212 attached to the proximal end 206 of the cannula 202 and a proximal end 214 having a wall 216 attached

thereto, the wall having an aperture 218 extending there-through. Trocar 100 includes a seal assembly 2 disposed within the housing comprising a plurality of layered elastomeric members 4a-4d forming conical shape seal 5. As described below, the plurality of layered elastomeric members 4a-4d have a semi-circular profile, and preferably having a circumference of about 180 to 270 degrees. As described below, the seal assembly preferably includes a first and second rigid rings (gasket retainer ring 8 and gasket ring 20) wherein the layered elastomeric members 4a-4d are disposed between and are abutting against the rings 8 and 20. As described below, the elastomeric members 4a-4d preferably include a proximal flange portion 70, and an inwardly extending portion 72 extending distally therefrom, wherein the proximal flange portions are disposed between and are abutting against the rings. Preferably, the seal assembly 2 has an outer perimeter 220 which is attached to a flotation means 80. As will be described in greater detail below, seal assembly 2 preferably includes a plurality of protectors 40 disposed proximal to the elastomeric seal. Lastly, trocar 100 preferably includes a zero closure valve shown in Figure 7 as a duck bill valve 230.

[0021] Referring now to Figures 2 and 2A, there is shown seal assembly 2 made in accordance with the present invention. Seal assembly 2 a crown 30, protectors 40, gasket ring 20, seal segments 4a-4d and gasket retainer ring 8. Gasket retainer ring 8 can be made of any number of materials known to those skilled in the art including, but not limited to, polycarbonate. Gasket retainer ring 8 includes ring base 9 having a top 11. Extending from top 11 of ring base 9 is a plurality of retainer pins 10. Ring base 9 also includes a plurality of holes 14 extending therethrough. Retainer pins 10 can be attached to top 11 of ring base 9 by any attachment means known to those skilled in the art or can integrally molded with ring base 9. Retainer pins 10 can be used with seal segments 4a-4d by placing the gasket retainer holes 6 over retainer pins 10. Ring base 9 further includes crush rib 12, shown in Figure 2A. Crush rib 12, which is the inner edge of the opening of ring base 9.

[0022] Gasket ring 20, shown in Figure 4, helps in securing seal segments 4a-4d onto retainer ring 8. Gasket ring 20 can be made of any number of materials known to those skilled in the art including, but not limited to, polycarbonate. Gasket ring 20, has top 22, bottom 24, and opening 23 therethrough. Gasket ring 20 further includes a plurality of gasket pin holes (not shown) disposed therein on bottom 24 for receiving retainer pins 10 and a plurality of crown holes 28 therein on top 22 for receiving crown pins 32. Gasket ring 20 further includes a plurality of gasket pins 29 extending from bottom 24

[0023] As shown in Figure 2, the seal assembly 2 further includes crown ring 30 and a plurality of protectors 40, which are located over seal segments 4a-4d. Crown ring 30, which can be made of any number of materials known to those skilled in the art including, but not limited to polycarbonate, is ring shaped member having bottom

31. Extending from bottom 31 of crown ring 30 is a plurality of crown pins 32. Crown pins 32 can be attached to bottom 31 of crown ring 30 by any attachment means known to those skilled in the art or can integrally molded therewith. Crown pins 32 can be used to assemble protectors 40 to gasket ring 20 of gasket assembly 3 forming seal assembly 2 of the present invention as illustrated in Figure 2. Protectors 40, which are preferably made of a thin flexible polymer, can be slightly trapezoidal and are overlapped or woven with one another and attached together by any means known to those skilled in the art to form a conical shape as illustrated in Figure 2. Such protectors are further described in EP 1 520 539.

[0024] The protectors 40 are attached to seal assembly 2 by trapping them between the distal surface 31 of the crown ring 30 and the proximal surface 22 of the gasket ring 20. Crown pins 32 on the distal surface 31 of the crown ring 30 pass through protector holes 42 in the protector flange 44 of the protectors 40. These crown pins 32 also affix to crown holes 28 on the proximal surface 22 of the gasket ring 20, thereby holding the protectors 40 fixed in place between the surfaces of the two parts.

[0025] When assembled as seal assembly 2, the protectors are layered together as described above, and the seal segments are layered together as described below. As is better seen by referring to figure 3, gasket pins 10 go through holes 6 in seal segments 4, and snap into gasket pin holes 26, and gasket pins 29 snap into holes 14 on retainer ring 8 to secure gasket ring 20 to gasket retainer ring 8 together, with the seal segments disposed therebetween. Crown pins 32 go through holes 42 on protectors 40 and snap into crown holes 28 to help secure gasket ring 20 to crown 30 with protectors 40 disposed therebetween. When all assembled, it forms seal assembly 2 (shown in Figure 7).

[0026] Seal protectors 40 are well known in the art and are described in U.S. Patent 5,308,336 issued to Hart et al. on May 3, 1994. As illustrated in Figures 2-6, retainer ring assembly 3 includes four seal segments 4a-4d, gasket retainer ring 8, and gasket ring 20. Any number of seal segments can be used and the invention herein is not limited by four. Each seal segment 4a-4d, which can be made of but is not limited to an elastomer such as, for example, silicon, can be molded flat or non-planar.

[0027] In one alternate embodiment, the pins and hole combinations are split between the gasket retainer ring 8 and the gasket ring 20. Four pins and twelve holes can be integral to the gasket ring 20, and twelve pins and four holes can be integral to the gasket retainer ring 8. The seals are then "woven" onto the gasket ring 20, requiring placement of each seal segment over only 3 pins. This is compared to the 10 pins required in the embodiment previously described. These pins hold the seal in the proper configuration, providing alignment of the gasket holes 6 with the remaining pin-hole pairs (10 and 26). When the gasket retainer ring 8 is assembled to the gasket ring 20, the twelve pins on the gasket retainer ring

pass through the aligned gasket holes, thereby trapping the seals as in the previous embodiment. Any number or combinations of pins and holes on gasket members 8 and 20 can be used.

[0028] Alternatively, one can use only four pins are for positive fixation through the gasket holes (6). The four pins can be located the gasket ring 20 and four corresponding holes can be located on the gasket retainer ring. The seal segments (4a-d) have holes only corresponding to these locations. To supplement the fixation associated with these pin-hole combinations, additional "pinch-pins" can be located on both the gasket ring 20 and the gasket retainer ring 8. These pinch-pins are conical-shaped protrusions projecting from both the distal surface 24 of the gasket ring 20 and the proximal surface 11 of the gasket retainer ring 8. These conical protrusions on each part radially align with one another, and compress the perimeter flange of the seal segments when the gasket ring 20 and gasket retainer ring 8 are assembled together. Due to the sharpness of the tip on the conical protrusions, they "dig in" to the flexible material of the seal segments, aiding in fixation of the perimeter of the seal segments.

[0029] Seal segments 4 can be made from any number of materials known to those skilled in the art including polyisoprene and silicone. Seal segments 4 comprise a proximal flat flange portion 70, and a inwardly extending distal portion 72. Seal segments 4, as seen in Figure 2, can have a semicircular shape having a circumference of 225 degrees such that when they are layered together they have a conical shape as shown in Figure 5. However, any number of different shapes would work as well. The seal segments can also be molded non-planar and each segment can be identical in design and shape or different. Preferably, the seal assembly 2 of the present inventions includes a plurality of seal segments 4 which are layered so as to form a multi-layer conical seal 5. The seal segments 4 can be stacked on top of one another to form this layered configuration, or can be woven together as described below.

[0030] In one preferred embodiment, as best described by referring to Figures 3,4 and 5, seal segments 4a-4d are woven with one another. Now, it will be described how seal segments 4a-4d can be assembled with retainer ring 8 and gasket ring 20 to form conical seal 5 of the present invention. The assembly can be completed by first placing gasket holes 6 of first seal segment 4a onto gasket retainer pins 10 of gasket retainer ring 8 as shown in the figures. Since first seal segment 4a is the first seal to be assembled to retainer ring 8 there is no specific retainer pin 10 location necessary to place gasket holes 6 of first seal 4a thereover. The gasket holes 6 of second seal segment 4b are then positioned onto gasket retainer pins 10 of gasket retainer ring 8 such that starting edge 15b of second seal 4b overlaps ending edge 17a of first seal 4a. Basically, the starting edge of each seal segment will share at least one retainer pin of the ending edge of an adjacent seal segment such that the

starting edge of one seal segment will be overlapped on top of the ending edge of an adjacent seal segment. Since this is a four piece design, starting edge 15b of second seal segment 4b is located at a position 90 degrees, in a counter clockwise fashion, from the starting edge 15a of the first seal segment 4a. After third section 4c has been placed on the pins, starting edge 15a of first seal segment 4a is removed from the pins allowing ending edge 17d of fourth seal segment 4d to be placed thereunder such that all seal segments 4a-4d are overlapping as shown in Figures 3-4. Starting edge 15d of fourth seal segment 4d is placed on gasket retainer pins 8 in the same manner as the others over third seal segment 4c. However, ending edge 17d of fourth seal segment 4d is placed under the removed portion of starting edge 15a of first seal segment 4a. Once fourth seal segment 4d has been seated on all of the gasket retainer pins 8, the removed portion of the first seal segment 4a is placed over the ending portion of the fourth seal segment 4d.

[0031] The above described embodiment of placing seal segments 4a-4d onto retainer pins 10, allows seal segments 4a - 4b to form a seal 5 having a conical shape as shown in Figures 3 and 5. Figure 5 shows seal 45 as having a hole 74 at its distal end. However, seal segments 4 could be configured so as not to have a hole there-through so as to form a zero closure valve. In addition, the seal segments themselves can be molded such that they have a varying thickness across the profile of the seal. This can be done for several reasons i.e. minimizing leak rate, drag, and is also described in EP 1 520 537.

[0032] Referring to Figure 6, a benefit of seal assembly 2 of the present invention is illustrated showing an increase in the ability to insert surgical instrument 90, like a surgical stapler or clip applier, with a larger range of instrument shaft diameters 50 into a trocar of the type described above as item 100. The herein described seal eliminates the classical issue of "hoop-stress" associated with lip seals. By breaking the seal into multiple segments, the strain in the system can be greatly reduced during instrument insertion. In the case of a seal that must seal on both 5 mm instruments as well as 12 mm instruments, this reduction in strain is believed to be as much as 75%. This yields much lower peak instrument insertion forces, instrument insertion drag forces, instrument extraction drag forces, and instrument peak extraction forces. The reduction in strain allows the seal to resist puncture during insertion of sharp instruments better than lip seals. When a sharp instrument contacts the seal, the increase in strain does not occur as rapidly as in lip seals. This allows the instrument to pass by prior to critical strain levels being reached, resulting in a puncture or tear.

[0033] The interwoven design of the seals of the above described embodiment allows for a single thickness of one seal segment to be contacting the instrument during instrument use the majority of the time (sometimes the overlap allows two seal segments to be contacting the instrument in localized regions). This is unlike other segmented seals where multiple seal layers are required to

be in contact with the instrument at a given location to provide an adequate seal. Therefore, the interwoven design provides a performance edge over other segments seal designs. This is evident in all areas of force associated with instrument use.

[0034] In addition, because the described embodiment reduces strain, it is possible to make the hole at the center of the seal smaller than is typically desired for lip seals. Forces associated with instrument use in lip seal designs are greatly affected by reductions in the size of the hole. While there is some impact with the segmented seal design of this patent, the effect is much less dramatic. Therefore, by reducing the hole-size at the center, the segmented seal can gain an improved ability to maintain insulation when a small instrument is axially offset to one side of the trocar channel with a very minimal effect on instrument usage forces. Alternatively, the seal can be put together such that there is no hole present provides a zero-closure design, sealing both when no instrument is present and while an instrument is present.

[0035] Preferably, the seal assembly can be mounted onto the trocar through a flotation means or system such as a bellows. Such seal flotation systems are described in U.S. Patent 5,385,553 issued to Hart et al. on January 31, 1995. By referring to figure 7, it can be seen that seal assembly 2 is connected to a flotation system 80. The bellows 80 allows for radial movement of the seal assembly. The radial force required to deflect the bellows radially is much less than the contact force exerted by the on the instrument. This will allow the flotation system to deflect while the seal segments maintain a sealing condition with the instrument. Protector flange 44 is first laid on top of ring surface 22. The flotation means can have a flange on its inner diameter with holes in it which can be laid over the protectors' flanges such that the holes in the bellow's flange line up with the holes in the protectors 42. This results in the flotation means being in-between, or sandwiched between, ring 31 and protectors 44. The flotation system can help to prevent the protectors from moving up and down unintentionally.

[0036] While preferred embodiments of the present invention have been shown and described herein, it will be obvious to those skilled in the art that such embodiments are provided by way of example only. Numerous variations, changes, and substitutions will now occur to those skilled in the art without departing from the invention. For example, as would be apparent to those skilled in the art, the disclosures herein have equal application in robotic-assisted surgery. In addition, it should be understood that every structure described above has a function and such structure can be referred to as a means for performing that function. Accordingly, it is intended that the invention be limited only by the scope of the appended claims.

Claims

1. A trocar (100) for performing a procedure on a pa-

tient, said trocar comprising:

- a. a hollow cannula (202) having a distal end (204) and a proximal end (206);
- b. a housing (210) having a distal end (212) attached to said proximal end (206) of said cannula (202) and a proximal end (214) having a wall (216) attached thereto, said wall (216) having an aperture (218) therethrough;
- c. a seal assembly (2) disposed within said housing (210) comprising a plurality of layered elastomeric members (4a-4d) each having at least a semi-circular profile,

characterised in that:

said plurality of layered elastomeric members (4a-4d) form a conical shape (5) and are disposed such that there is a substantially centrally located aperture (74) in said seal assembly (2).

2. The trocar (100) according to claim 1 wherein said layered elastomeric members (4a-4d) have a circumference of about 180 to 270 degrees.
3. The trocar (100) according to claim 1, wherein said seal assembly (2) includes a first and second rigid rings (8, 20) wherein said layered elastomeric members (4a-4d) are disposed between and are abutting against said rings (8, 20).
4. The trocar (100) according to claim 3 wherein said elastomeric members (4a-4d) comprise a proximal flange portion (70), and an inwardly extending portion (72) extending distally therefrom, wherein said proximal flange portions (70) are disposed between and are abutting against said rings (8, 20).
5. The trocar (100) according to claim 3 wherein said seal assembly (2) has an outer perimeter (220) which is attached to a flotation means (80).
6. The trocar (100) according to claim 1 wherein said seal assembly (2) includes a plurality of protectors (40) disposed proximal to said elastomeric seal.
7. The trocar (100) according to claim 1 wherein said plurality of elastomeric members (4a-4d) are woven together.
8. The trocar (100) according to claim 1 wherein said plurality of elastomeric members (4a-4d) have a non-planer shape prior to be assembled together.

Patentansprüche

1. Trokar (100) zum Durchführen einer Prozedur bei

einem Patienten, wobei der Trokar aufweist:

- a. eine hohle Kanüle (202) mit einem distalen Ende (204) und einem proximalen Ende (206);
 - b. ein Gehäuse (210) mit einem distalen Ende (212), das an dem proximalen Ende (206) der Kanüle (202) befestigt ist, und einem proximalen Ende (214), an dem eine Wand (216) befestigt ist, wobei die Wand (216) eine durchgehende Öffnung (218) hat;
 - c. eine Dichtanordnung (2), die innerhalb des Gehäuses (210) angeordnet ist, welche eine Vielzahl geschichteter elastomerer Elemente (4a - 4d) aufweist, wobei jedes wenigstens ein halbkreisförmiges Profil hat, **dadurch gekennzeichnet, daß:**
 - die Vielzahl der geschichteten elastomeren Elemente (4a - 4d) eine konische Form (5) bildet und derart angeordnet ist, daß es eine im wesentlichen mittig angeordnete Öffnung (74) in der Dichtanordnung (2) gibt.
2. Trokar (100) nach Anspruch 1, bei dem die geschichteten elastomeren Elemente (4a - 4d) einen Umfang von ungefähr 180 bis 270 Grad haben.
 3. Trokar (100) nach Anspruch 1, bei dem die Dichtanordnung (2) einen ersten und einen zweiten starren Ring (8, 20) umfaßt, wobei die geschichteten elastomeren Elemente (4a - 4d) zwischen den Ringen (8, 20) angeordnet sind und an diesen anliegen.
 4. Trokar (100) nach Anspruch 3, bei dem die elastomeren Elemente (4a - 4d) einen proximalen Flanschbereich (70) und einen sich nach innen erstreckenden Bereich (72), der sich distal von diesem erstreckt, aufweisen, wobei die proximalen Flanschbereiche (70) zwischen den Ringen (8, 20) angeordnet sind und an diesen anliegen.
 5. Trokar (100) nach Anspruch 3, bei dem die Dichtanordnung (2) eine äußere Berandung (220) hat, die an einer Floationseinrichtung (80) befestigt ist.
 6. Trokar (100) nach Anspruch 1, bei dem die Dichtanordnung (2) eine Vielzahl von Protektoren (40) umfaßt, die proximal zu der elastomeren Dichtung angeordnet sind.
 7. Trokar (100) nach Anspruch 1, bei dem die Vielzahl der elastomeren Elemente (4a - 4d) miteinander verwoben sind.
 8. Trokar (100) nach Anspruch 1, bei dem die Vielzahl der elastomeren Elemente (4a - 4d), bevor sie zusammengesetzt werden, eine nicht ebene Form haben.

Revendications

1. Trocart (100) destiné à exécuter une procédure sur un patient, ledit trocart comprenant :
 - a. une canule creuse (202) présentant une extrémité distale (204) et une extrémité proximale (206) ;
 - b. un boîtier (210) présentant une extrémité distale (212) fixée à ladite extrémité proximale (206) de ladite canule (202) et une extrémité proximale (214) présentant une paroi (216) fixée à celle-ci, ladite paroi (216) présentant une ouverture (218) la traversant ;
 - c. un ensemble de joint (2) disposé à l'intérieur dudit boîtier (210) comprenant une pluralité d'éléments élastomères stratifiés (4a-4d) présentant chacun au moins un profil semi-circulaire, **caractérisé en ce que :**
 - ladite pluralité d'éléments élastomères stratifiés (4a-4d) forment une configuration conique (5) et sont disposés de telle sorte qu'il existe une ouverture (74) située sensiblement de manière centrale dans ledit ensemble de joint (2).
2. Trocart (100) selon la revendication 1 dans lequel lesdits éléments élastomères stratifiés (4a-4d) présentent une circonférence d'environ 180 à 270 degrés.
3. Trocart (100) selon la revendication 1, dans lequel ledit ensemble de joint (2) comporte une première et une seconde bagues rigides (8, 20) dans lequel lesdits éléments élastomères rigides (4a-4d) sont disposés entre lesdites bagues (8, 20) et sont en butée contre celles-ci.
4. Trocart (100) selon la revendication 3 dans lequel lesdits éléments élastomères (4a-4d) comprennent une partie de rebord proximale (70), et une partie s'étendant vers l'intérieur (72) s'étendant de manière distale depuis celle-ci, dans lequel lesdites parties de rebord proximal (70) sont disposées entre lesdites bagues (8, 20) et sont en butée contre celles-ci.
5. Trocart (100) selon la revendication 3 dans lequel ledit ensemble de joint (2) présente un périmètre externe (220) qui est fixé à des moyens de flottation (80).
6. Trocart (100) selon la revendication 1 dans lequel ledit ensemble de joint (2) comporte une pluralité de protecteurs (40) disposés de manière proximale par rapport au dit joint élastomère.
7. Trocart (100) selon la revendication 1 dans lequel

ladite pluralité d'éléments élastomères (4a-4d) sont tissés les uns avec les autres.

8. Trocart (100) selon la revendication 1 dans lequel ladite pluralité d'éléments élastomères (4a-4d) présentent une forme non plane avant d'être assemblés les uns aux autres.

10

15

20

25

30

35

40

45

50

55

FIG. 1

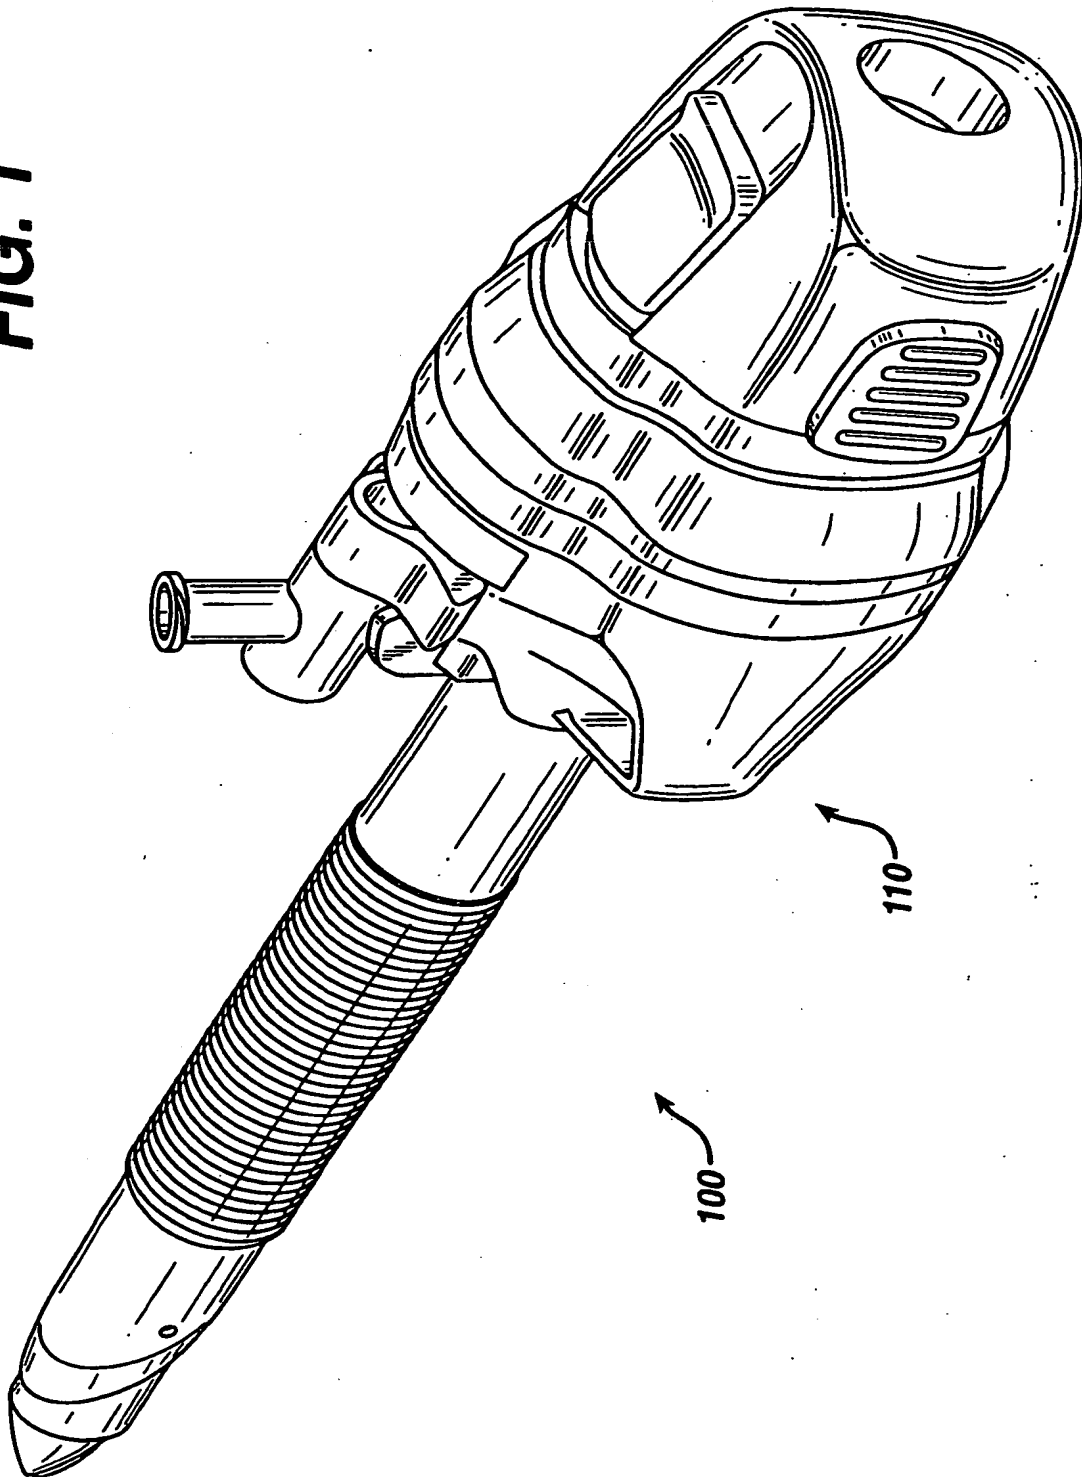


FIG. 2

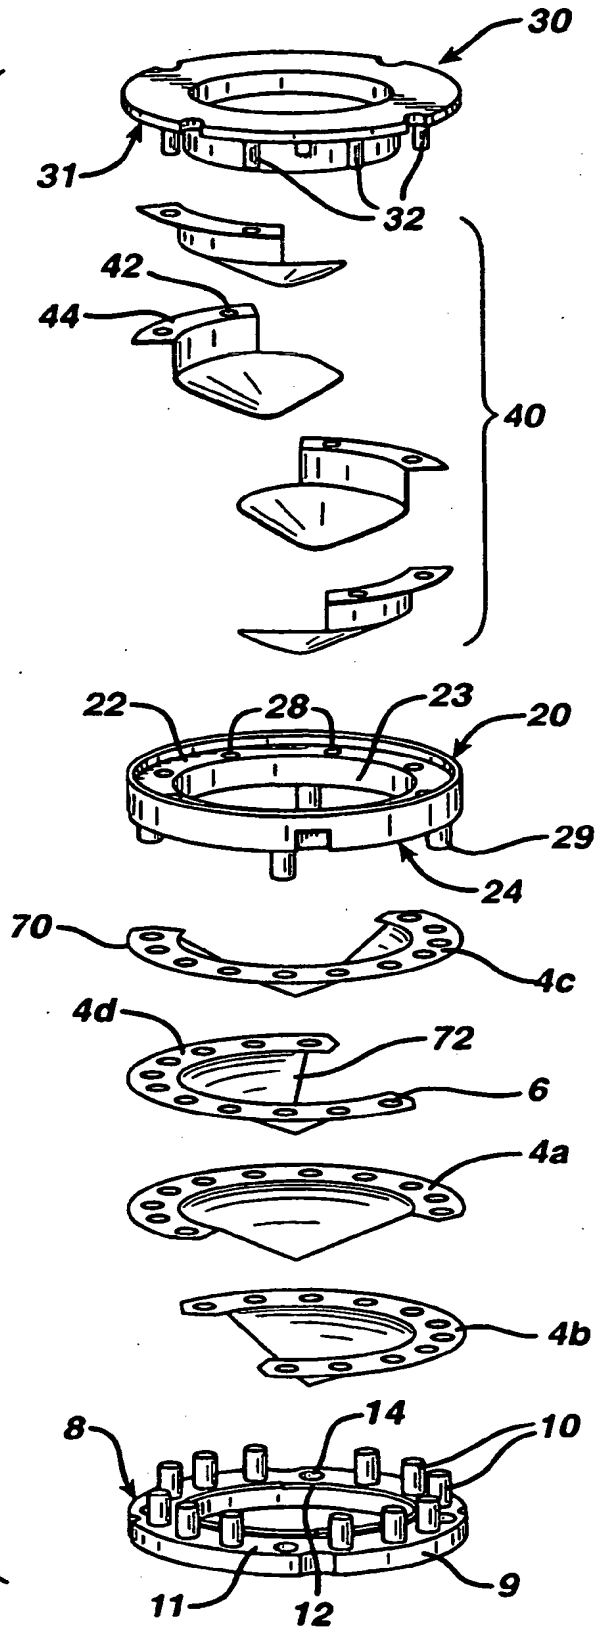


FIG. 2A

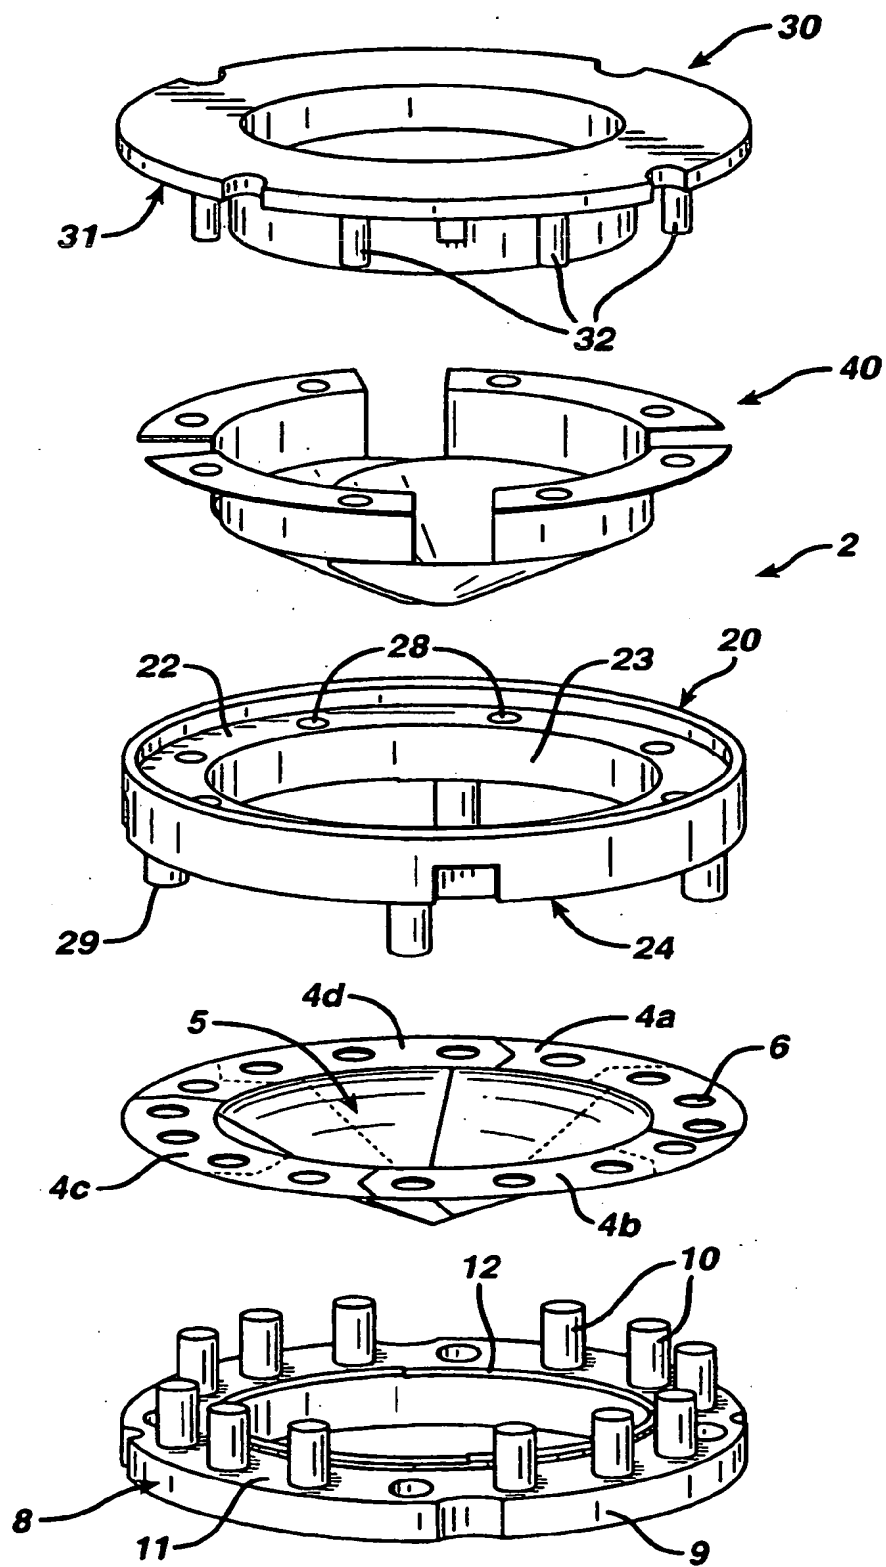


FIG. 3

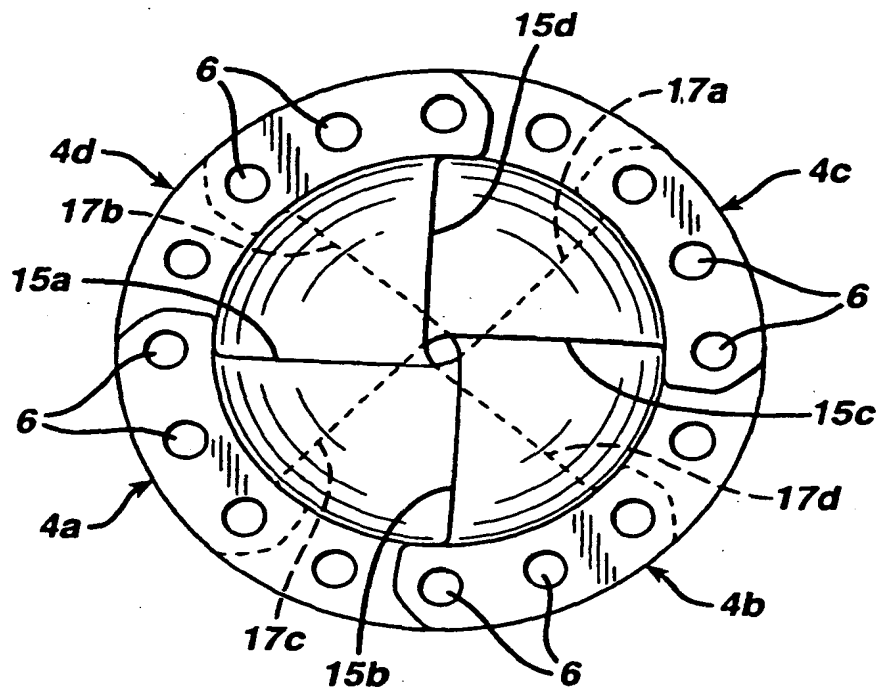


FIG. 4

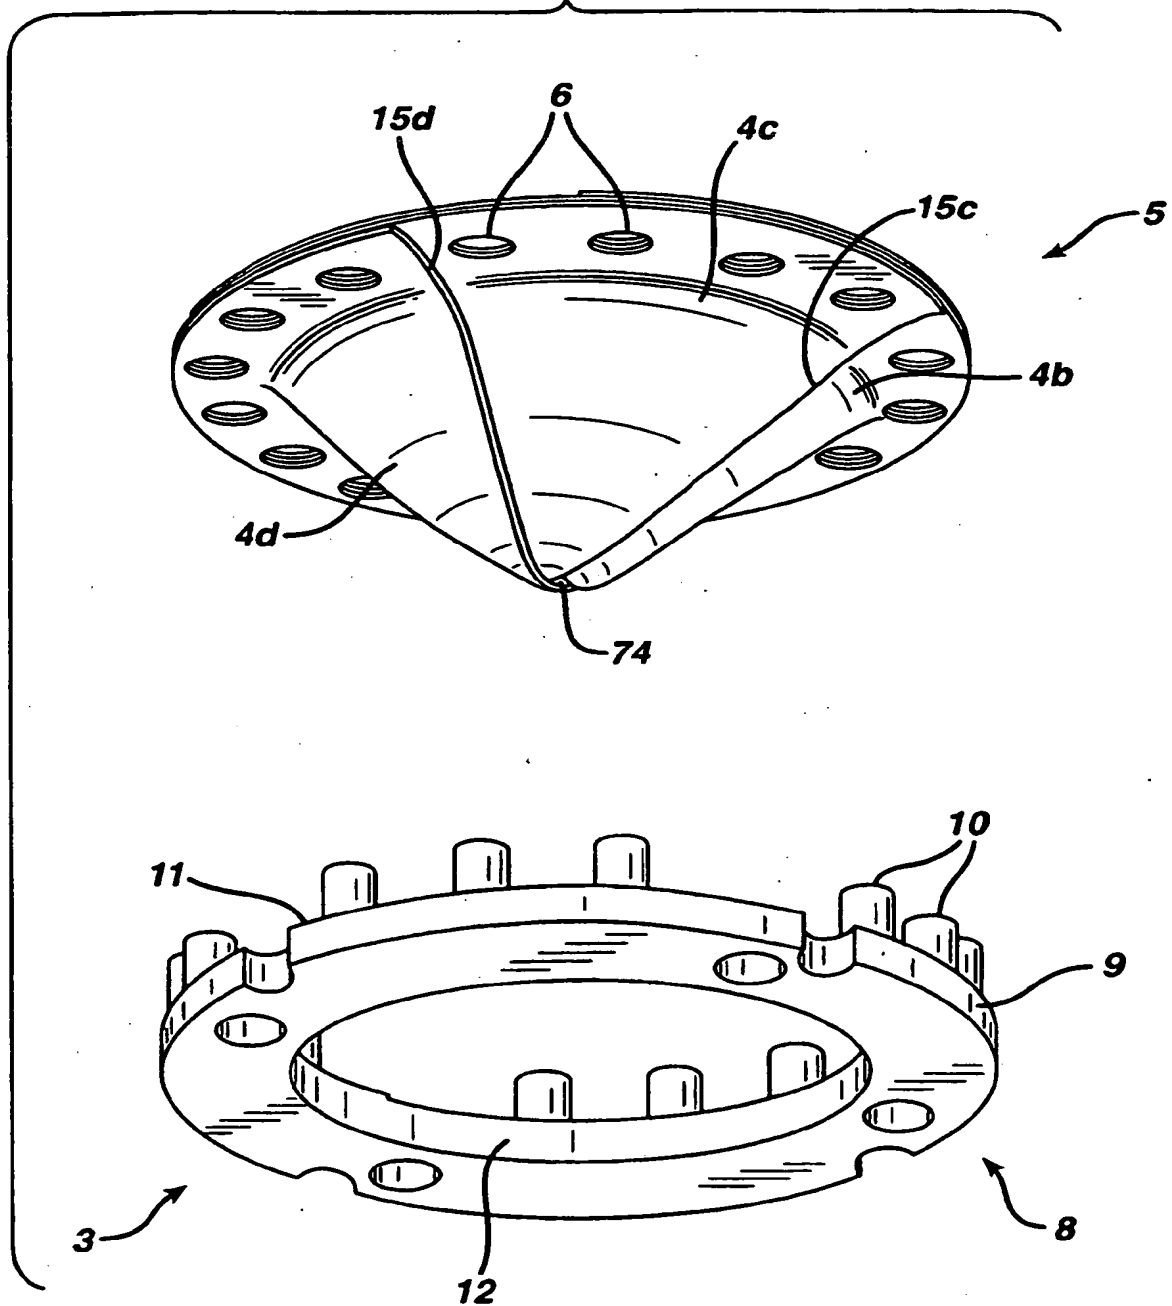


FIG. 5



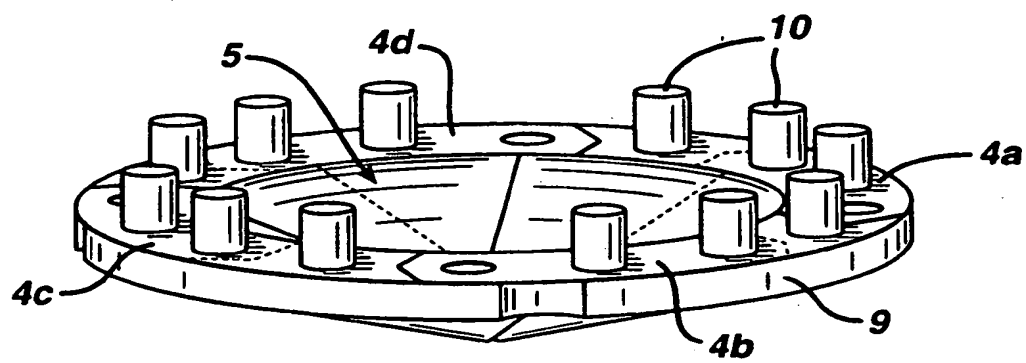


FIG. 6

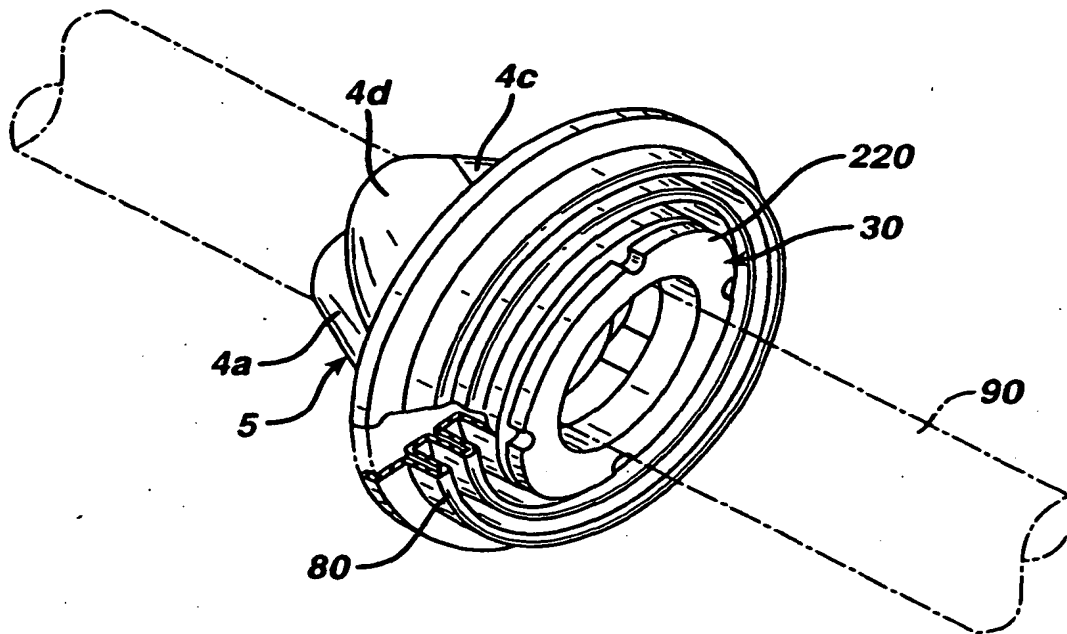

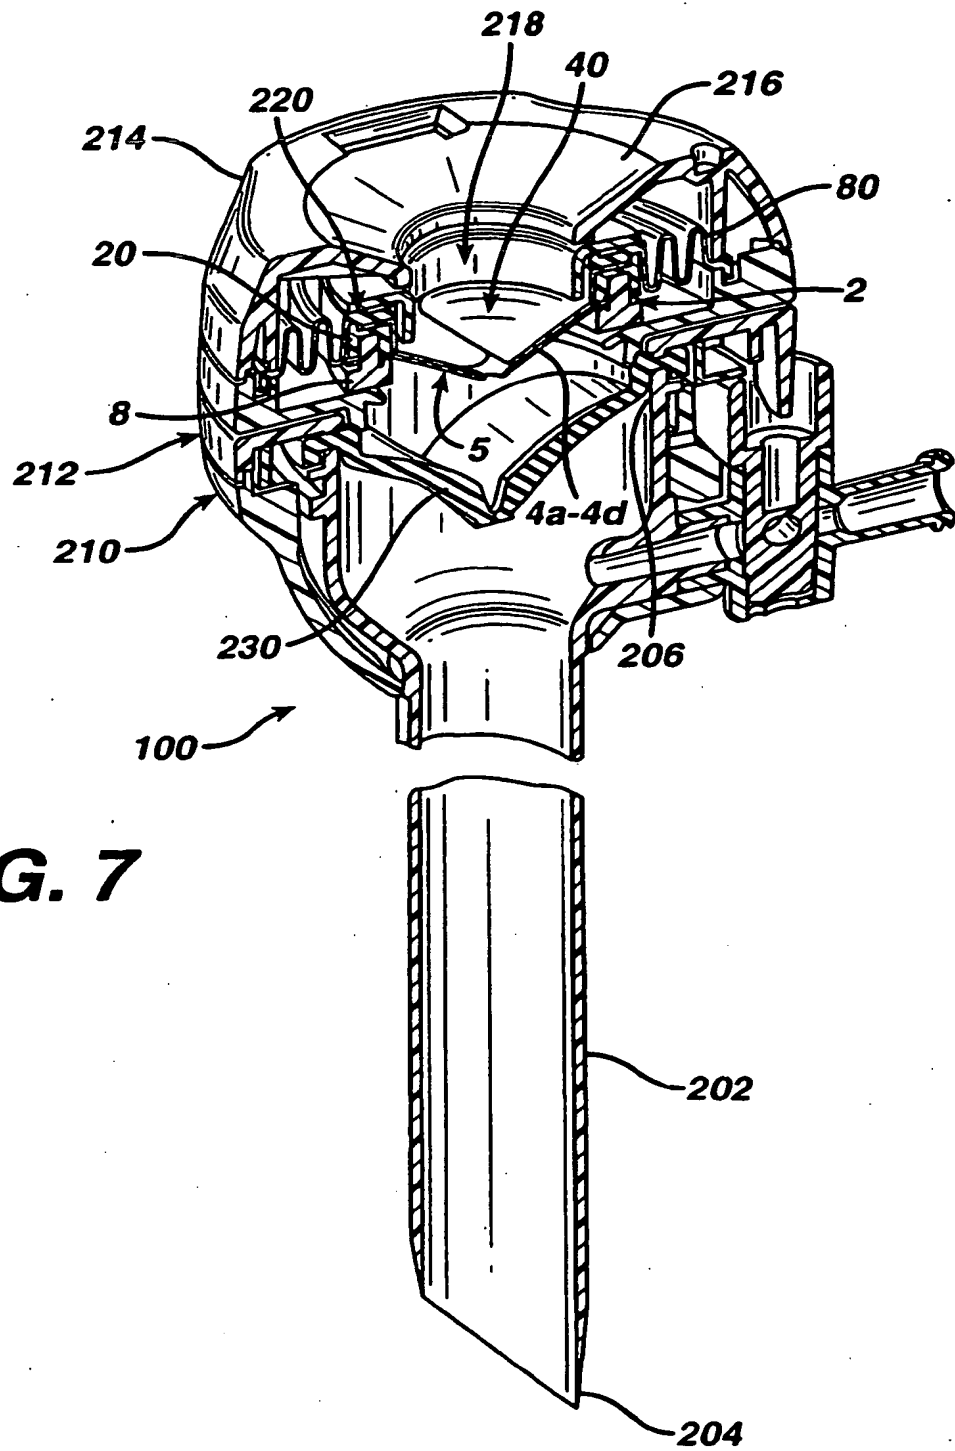

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6017356 A, Frederick [0004] [0019]
- EP 0567142 A [0007]
- US 5743884 A [0007]
- EP 1520539 A [0023]
- US 5308336 A, Hart [0026]
- EP 1520537 A [0031]
- US 5385553 A, Hart [0035]